LUMACURVE® AIRFIELD SIGNS

Certified to current FAA Advisory Circular 150/5345-44
Specification for Runway and Taxiway Signs
View our FAA Certificate of Conformance

SIZE 2 SIGN, MODE 3

Parts List

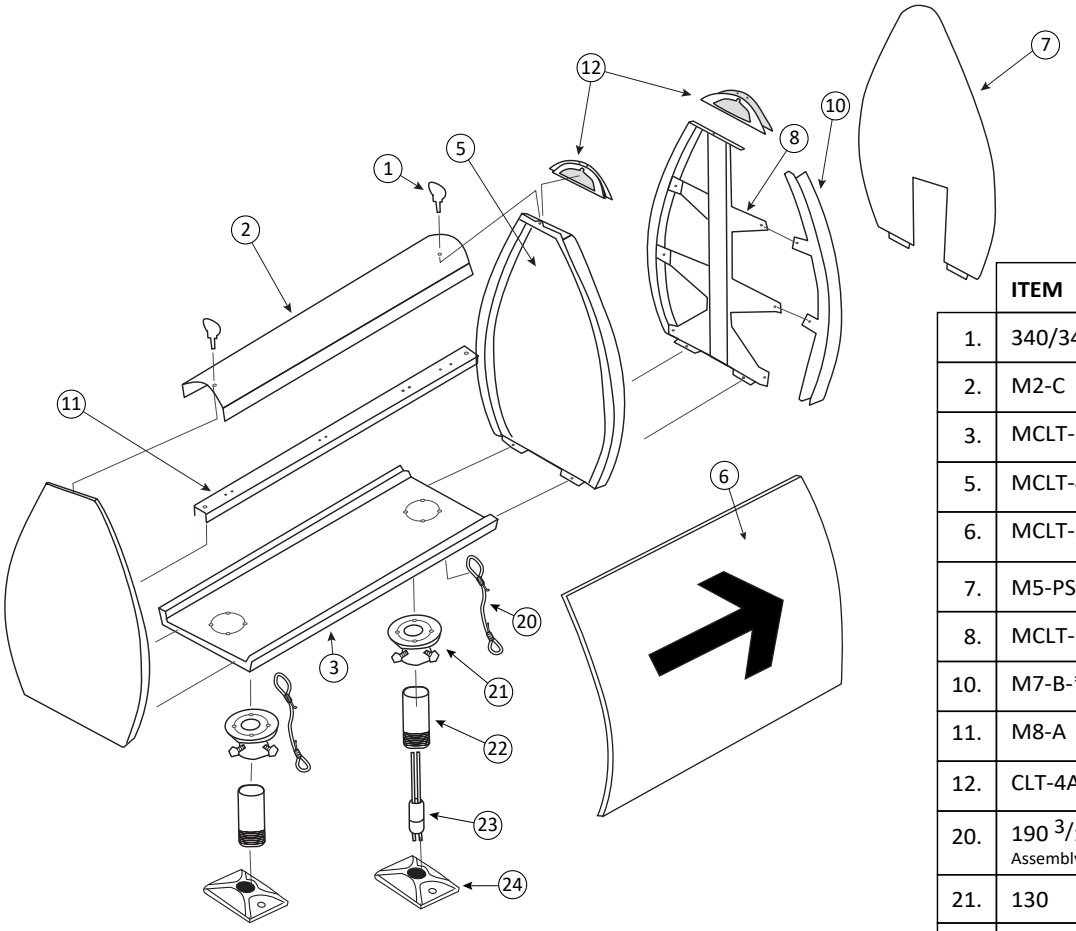

	ITEM	DESCRIPTION
1.	340/345	Turn Fastener/Retainer
2.	M2-C	Performance Top
3.	MCLT-3*	Base
5.	MCLT-4	End Panel
6.	MCLT-5*	Legend Panel
7.	M5-PS	Full Length Panel Spacer Inserts
8.	MCLT-6	Multi-Module Insert *(Tree)*
10.	M7-B-**	Face Insert Channel
11.	M8-A	Light Bar
12.	CLT-4AC	Adapter Casting^
20.	190 3/16" Assembly	Tether *(2 per module)*
21.	130	Slip-Fitter
22.	140-S2M3	6" Frangible Coupling
23.	430	Cord & Plug
24.	15	5"x 8" Aluminum Floor Flange

* Must indicate Mode 3 when ordering
** Replace with color track needed
^ Must indicate number of modules when ordering

MODE 3 INSTALLATION

SIZE Medium - FAA SIZE 2 (15" LETTERS)
Mounting hole center lines
(Outer Mount Only)

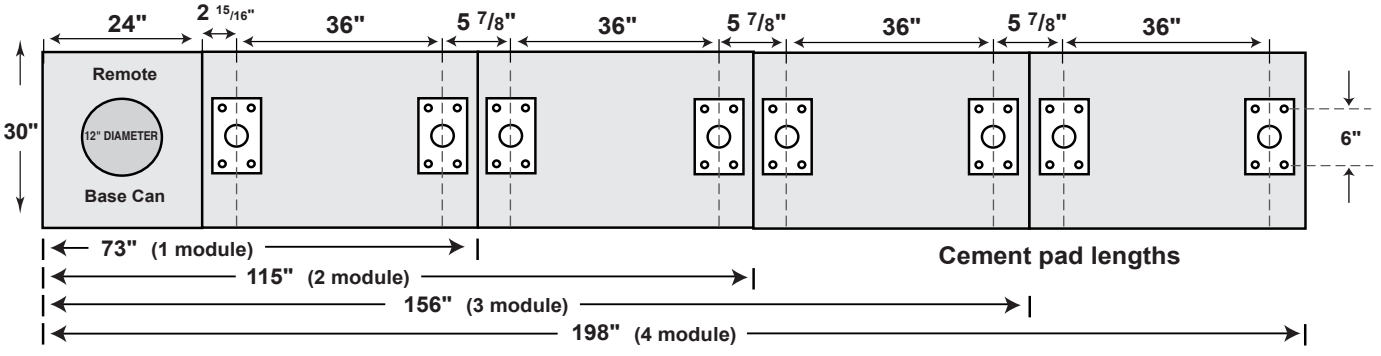

Above references recommended cement pad dimensions and mounting bolt locations for Lumacurve signs.
Recommended concrete thickness : 6"- 8"
Recommended anchor bolts: Size 1 & 2: 1/2" x 5" / Size 3 & 5: 5/8" x 5"

LUMACURVE AIRFIELD SIGNS
9115 Freeway Dr., Macedonia, OH 44056
800-258-1997 www.lumacurve.com