


SIGN NUMBERING SYSTEM

SPECIFICATIONS SHEET

TECHNICAL DATA

	MATERIAL	SIZE
ID Tags	Polyolefin	2.58"H x 1.56"W
		2" Character height (standard)
ID Tag holder		
3 Character (horizontal)	Polyethelene	7"L x 2.75"W
4 Character (horizontal)	Polyethelene	8"L x 2.75"W
4 Character (vertical)	Polyethelene	12"H x 1.75"W
Message length: 3 characters or 4 characters		
Mounting		
Vertical or Horizontal mounting		
Mounting hardware includes: (4) Self-drilling/tapping screws per holder		

ID TAG SPECIFICATIONS

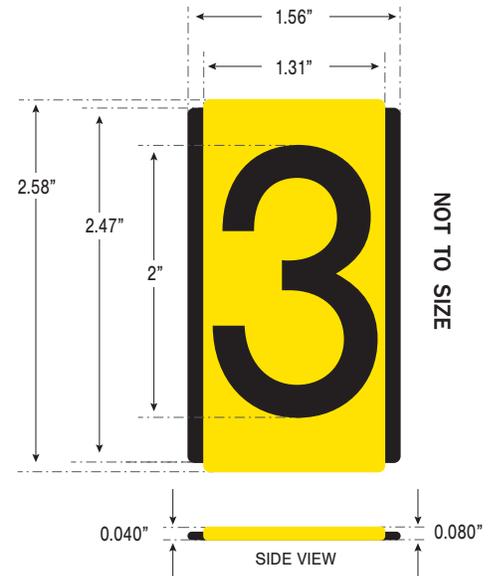

PERFORMANCE

- Clear and accurate reference for servicing signage
- System of high visibility, 2" characters
- Provides a clear and readable reference
- UV polyolefin ensures long life and readability
- 4 Self-drilling screws make installation simple
- Flexible system allows easy changes
- Facilitates accurate notations during inspections
- Eliminates use of location descriptions
- Lifetime warranty*

CONSTRUCTION AND WARRANTY

*ID Tags carry a lifetime warranty for legibility. If during the period any tag fails to remain legible, a new tag will be provided free of charge. They resist chemical and alkali attack, fading, chipping, peeling and cracking and are suited for application above and below ground in any environment

ID TAG HOLDER SPECIFICATIONS

